


ELECTRIC B.O.P TEST PUMP



BOP TESTER UP TO 22.5K

DIMENSIONS: 54x72x72

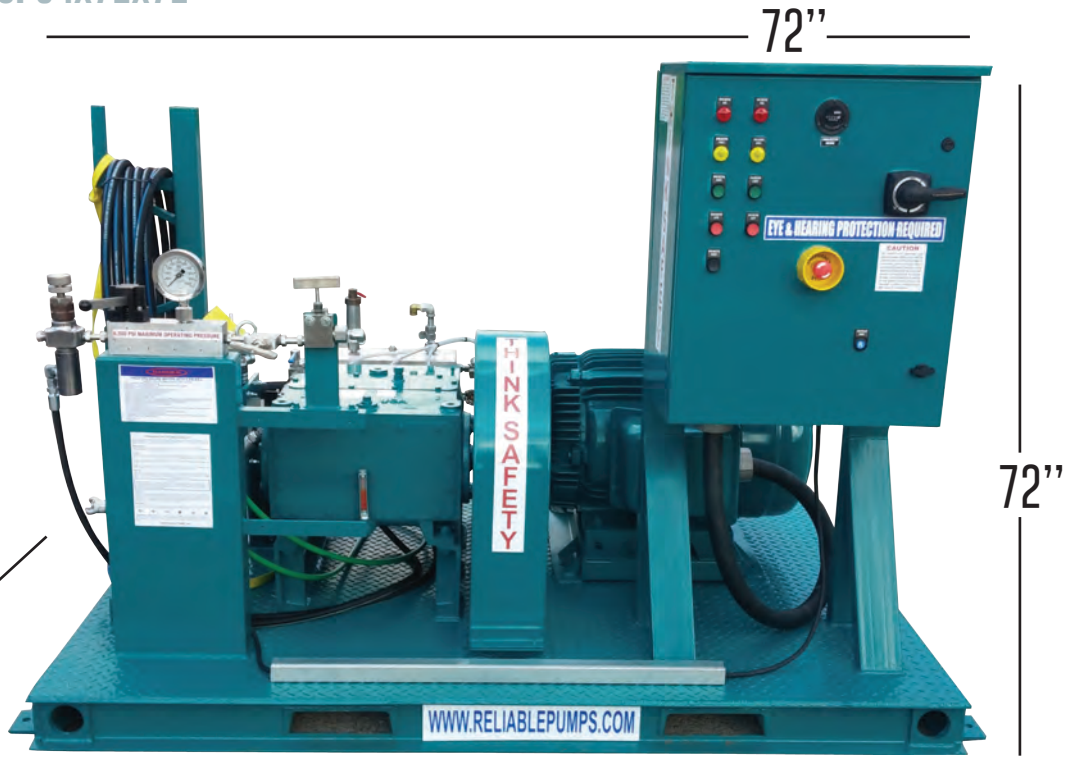

RD100 SERIES 2.75" STROKE HYDROSTATIC TESTING ONLY												
HYDROSTATIC TESTING ONLY			FLOW									
PLUMGER DIA.	MAX. PRESSURE		200 RPM		300 RPM		400 RPM		500 RPM		550 RPM	
	PSI	BAR	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM
.625" - 15.87MM	22,500	1551.4	2.2	8.3	3.28	9.2	4.38	16.5	5.47	20.7	6.02	24.8
.750" - 19.0MM	20,000	1379	3.14	11.9	4.7	17.9	6.3	23.9	7.9	29.8	8.5	32.8
.875" - 22.2MM	14,000	965.1	4.3	16.2	6.4	24.3	8.6	33.4	10.7	40.6	11.8	44.7
1.000" - 25.4MM	10,000	690	5.6	34.8	8.4	31.8	11.2	42.4	14	53	15.4	58.4
MAX. PLUMGER LOAD 8,832 L.B.												

FEATURES AND BENEFITS

- EQUIPPED WITH 40 TO 75 HP NEMA RATED ELECTRIC MOTOR
- NEMA 4 SOLID STATE ENCLOSURE
- 4 POINT LIFT CERTIFIED MP AND PULL TEST IF REQUESTED
- CAN BE CERTIFIED TO DNV 2.7.1/2.7.3 FOR OFFSHORE USE, TO INCLUDE SLINGS AND DROP TESTING
- MINIMAL FOOTPRINT
- CARBIDE COATED PLUNGERS
- IN LINE VALVES
- WATER OR OIL LUBRICATED FLUID END

WWW.RELIABLEPUMPS.COM/INFO@RELIABLEPUMPS.COM

5404 CEDAR CREST
HOUSTON, TEXAS 77087
UNITED STATES
PHONE: 713 640 2718
TOLL FREE: 800 801 6993
FAX: 713 640 1404



RELIABLE PUMPS CONSULTANTS